

GV300W User Manual

GSM/GPRS/WCDMA/GNSS Tracker

TRACGV300WUM001

Version:[1.03]



International Telematics Solutions Innovator

www.queclink.com

Document Title	GV300W User Manual
Version	1.03
Date	2017-02-15
Status	Release
Document Control ID	TRACGV300WUM001

General Notes

Queclink offers this information as a service to its customers, to support application and engineering efforts that use the products designed by Queclink. The information provided is based upon requirements specifically provided to Queclink by the customers. Queclink has not undertaken any independent search for additional relevant information, including any information that may be in the customer's possession. Furthermore, system validation of this product designed by Queclink within a larger electronic system remains the responsibility of the customer or the customer's system integrator. All specifications supplied herein are subject to change.

Copyright

This document contains proprietary technical information which is the property of Queclink Wireless Solutions Co., Ltd. The copying of this document, and giving it to others and the using or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights reserved in the event of grant of a patent or the registration of a utility model or design. All specifications supplied herein are subject to change without notice at any time.

Contents

Contents	3
0. Revision History	6
1. Introduction	7
1.1 .Reference.....	7
1.2 .Terms and Abbreviations	7
2. Product Overview.....	8
2.1. Check Parts List.....	8
2.2. Parts List	9
2.3. Interface Definition	10
2.4. GV300W User Cable Color.....	11
3. Get Started	12
3.1. Open the Case	12
3.2. Close the Case	12
3.3. Install a SIM Card.....	13
3.4. Install the Internal Backup Battery	13
3.5. Switch on the Backup Battery	14
3.6. Install the External GPS Antenna (Optional).....	14
3.6.1. GPS Antenna Specification	15
3.7. Power Connection	15
3.8. Ignition Detection.....	16
3.9. Digital Inputs	16
3.10. Analog Inputs	17
3.11. Digital Outputs	18
3.12. Device Status LED	19
3.13. Serial Port/UART Interface	20
3.13.1. Connect with Garmin GPS Set	21
3.13.2. Connect with CAN100 device	22

Table Index

TABLE 1.	GV300W PROTOCOL REFERENCE.....	7
TABLE 2.	TERMS AND ABBREVIATIONS.....	7
TABLE 3.	PARTS LIST.....	9
TABLE 4.	DESCRIPTION OF 16 PIN CONNECTIONS.....	10
TABLE 5.	GV300W USER CABLE COLOR DEFINITION	11
TABLE 6.	GPS ANTENNA SPECIFICATION.....	15
TABLE 7.	ELECTRICAL CHARACTERISTICS OF IGNITION DETECTION	16
TABLE 8.	ELECTRICAL CHARACTERISTICS OF THE DIGITAL INPUTS.....	16
TABLE 9.	ELECTRICAL CHARACTERISTICS OF DIGITAL OUTPUTS.....	18
TABLE 10.	DEFINITION OF DEVICE STATUS AND LED	20
TABLE 11.	EXTERNAL INTERFACE OF CAN100 DEVICE	22
TABLE 12.	CAN100 DEVICE CONNECT WITH GV300W	22

Figure Index

FIGURE 1.	APPEARANCE OF GV300W	8
FIGURE 2.	THE 16 PIN CONNECTOR ON THE GV300W	10
FIGURE 3.	OPEN THE CASE	12
FIGURE 4.	CLOSE THE CASE	12
FIGURE 5.	SIM CARD INSTALLATION	13
FIGURE 6.	BACKUP BATTERY INSTALLATION	13
FIGURE 7.	SWITCH AND ON/OFF POSITION.....	14
FIGURE 8.	GPS ANTENNA OF GV300W	14
FIGURE 9.	TYPICAL POWER CONNECTION.....	15
FIGURE 10.	TYPICAL IGNITION DETECTION	16
FIGURE 11.	TYPICAL DIGITAL INPUT CONNECTION.....	17
FIGURE 12.	TYPICAL ANALOG INPUT CONNECTION	17
FIGURE 13.	DIGITAL OUTPUT INTERNAL DRIVE CIRCUIT	18
FIGURE 14.	TYPICAL CONNECTION WITH RELAY	18
FIGURE 15.	TYPICAL CONNECTION WITH LED	19
FIGURE 16.	GV300W LED ON THE CASE	19
FIGURE 17.	TYPICAL CONNECTION WITH RS232 PORT.....	21
FIGURE 18.	GV300W CONNECTION WITH GARMIN GPS SET	21
FIGURE 19.	THE EXTERNAL INTERFACE OF CAN100 DEVICE.....	22

0.Revision History

Revision	Date	Author	Description of change
1.00	2015-01-30	Leo Lei	Initial
1.01	2015-07-29	Richard Deng	Update the related information about Introduction
1.02	2015-09-10	Richard Deng	Delete voice-related content and add the warning content for not SAR test
1.03	2017-02-15	Richard Deng	Restore voice-related information

1.Introduction

The GV300W is a compact GNSS tracker designed for a wide variety of vehicle tracking applications. It has multiple I/O interfaces that can be used for monitoring or controlling external devices. Its built-in GNSS receiver has superior sensitivity and fast time to first fix. Its triple band WCDMA subsystem supports UMTS/HSDPA 850 (Band V)/1900 (Band II)/2100(Band I) MHz and GSM/GPRS 850/900/1800/1900 MHz allowing the GV300W's location to be monitored in real time or periodically tracked by a backend server and mobile devices. Its built-in 3-axis accelerometer allows driving behavior monitoring, motion detection and extended battery life through sophisticated power management algorithms. System integration is straightforward as complete documentation is provided for the full featured @Track protocol. The @Track protocol supports a wide variety of reports including emergency, geo-fence boundary crossings, driving behavior, low battery and scheduled GNSS position.

1.1.Reference

Table 1. GV300W Protocol Reference

SN	Document name	Remark
[1]	GV300W @Track Air Interface Protocol	The air protocol interface between GV300W and backend server.

1.2.Terms and Abbreviations

Table 2. Terms and Abbreviations

Abbreviation	Description
AGND	Analog Ground
AIN	Analog Input
DIN	Digital Input
DOUT	Digital Output
GND	Ground
MIC	Microphone
RXD	Receive Data
TXD	Transmit Data
SPKN	Speaker Negative
SPKP	Speaker Positive

2.Product Overview

2.1.Check Parts List

Before starting, check whether all the following items have been included with your GV300W. If anything is missing, please contact your supplier.



Figure 1. Appearance of GV300W

2.2.Parts List

Table 3. Parts List

Name	Picture
GV300W Locator	80*49*26 mm
User Cable	
Extension Cable (Optional)	
GPS Antenna (Optional)	
DATA_CABLE_W (Optional)	

2.3.Interface Definition

The GV300W has a 16 PIN interface connector which contains the connections for power, I/O, RS232, microphone, speaker, etc. The sequence and definition of the 16PIN connector are shown in the following figure:

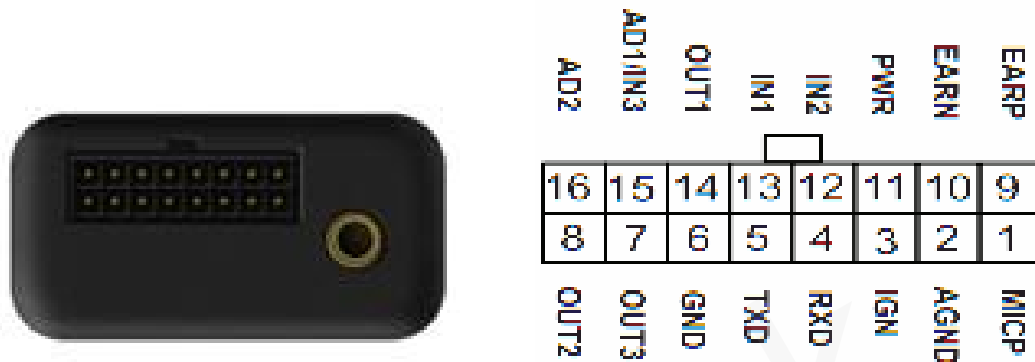


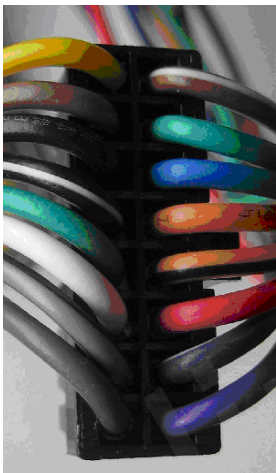
Figure 2. The 16 PIN Connector on the GV300W

Table 4. Description of 16 PIN Connections

Index	Description	Comment
1	MICP	Single end, 2-2.2k microphone, internal bias
2	AGND	Analog ground
3	IGN	Ignition input, positive trigger
4	RXD	UART RXD, RS232
5	TXD	UART TXD, RS232
6	GND	Power and digital ground
7	OUT3	Open drain, 150 mA max
8	OUT2	Open drain, 150 mA max
9	EARP	Differential output, 32 ohm 1/4w speaker
10	EARN	
11	PWR	External DC power input, 8-32V
12	IN2	Digital input, negative trigger
13	IN1	Digital input, negative trigger
14	OUT1	Open drain, 150 mA max ,with latch circuit
15	AD1/IN3	Multifunction input, analog or digital input 0-16V
16	AD2	Analog input 0.3-16V

2.4.GV300W User Cable Color

Table 5. GV300W User Cable Color Definition

Definition	Color	PIN No	Cable	PIN No	Color	Definition
OUT2	Yellow	8		16	Brown/White	AD2
OUT3	Brown	7		15	Green	AD1/IN3
GND	Black	6		14	Blue	OUT1
TXD	White/Black	5		13	Orange	IN1
RXD	Green or Pink	4		12	Orange/Black	IN2
IGN	White	3		11	Red	PWR
AGND	Gray/Black	2		10	Purple/White	EARN
MICP	Gray	1		9	Purple	EARP

3. Get Started

3.1. Open the Case



Figure 3. Open the Case

Insert the triangular-pry-opener into the gap of the case as shown above, and push the opener up until the case is unsnapped.

3.2. Close the Case



Figure 4. Close the Case

Place the cover on the bottom in the position as shown in the figure above. Slide the cover against the direction of the arrow until it snaps.

3.3.Install a SIM Card

Open the case and ensure the unit is not powered (unplug the 16Pin cable and switch the internal battery to the OFF position). Slide the holder right to open the SIM card holder. Insert the SIM card into the holder as shown below with the gold-colored contact area facing down. Take care to align the cut mark. Close the SIM card holder. Close the case.



Figure 5. SIM Card Installation

3.4.Install the Internal Backup Battery



Figure 6. Backup Battery Installation

GV300W has an internal backup Li-ion battery.

3.5.Switch on the Backup Battery

To use the GV300W backup battery, the switch must be in the ON position. The switch on the case and the ON/OFF position are shown below.



Figure 7. Switch and ON/OFF Position

Note:

1. The switch must be in the "OFF" position when the GV300W is shipped on an aircraft.
2. When the switch is in the "OFF" position, the battery cannot be charged or discharged.

3.6.Install the External GPS Antenna (Optional)

There is a SMA GPS antenna connector on GV300W. The GV300W will automatically detect and use an external antenna when connected.



Figure 8. GPS Antenna of GV300W

3.6.1.GPS Antenna Specification

Table 6. GPS Antenna Specification

GPS antenna	Specification
Frequency	1575.42 MHz
Bandwidth	>5 MHz
Beam width	>120 deg
Supply voltage	2.7V-3.3V
Polarization	RHCP
Gain	Passive: 0 dBi min Active: 15 dB
Impedance	50Ω
VSWR	<2
Noise figure	<3

3.7.Power Connection

PWR (PIN11)/GND (PIN6) is the power input pin. The input voltage range for this device is from 8V to 32V. The device is designed to be installed in vehicles that operate on 12V or 24V systems without the need for external transformers.

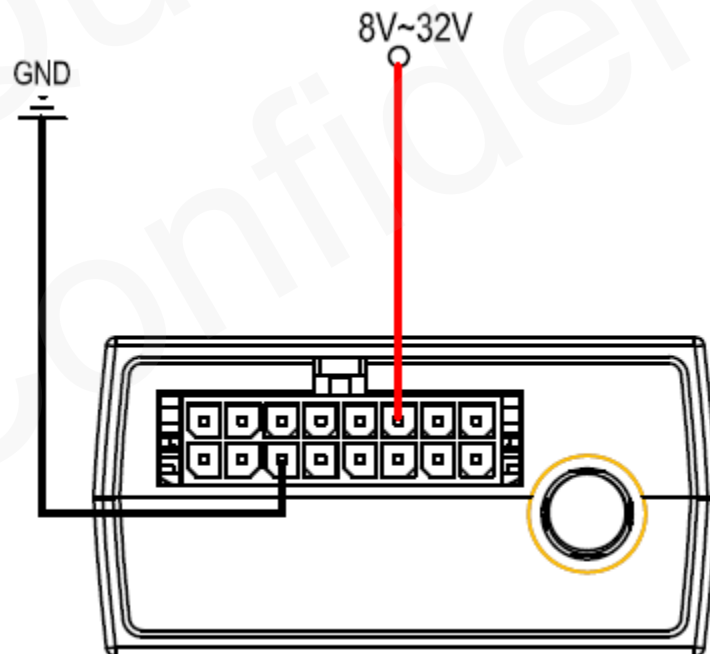


Figure 9. Typical Power Connection

3.8. Ignition Detection

Table 7. Electrical Characteristics of Ignition Detection

Logical status	Electrical characteristics
Active	5.0V to 32V
Inactive	0V to 3V or open

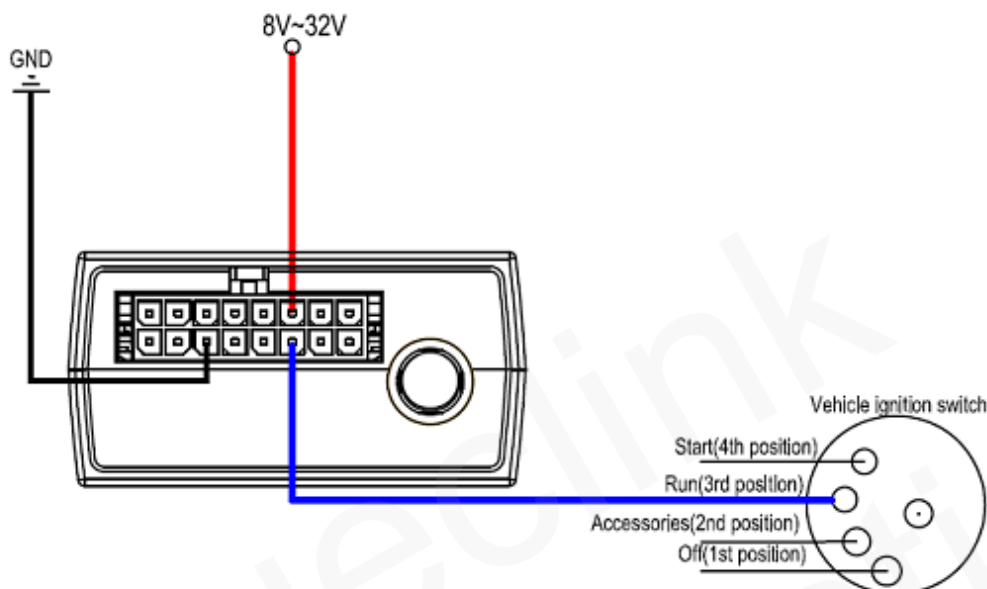


Figure 10. Typical Ignition Detection

IGN (Pin3) is used for ignition detection. It is strongly recommended to connect this pin to ignition key “RUN” position as shown above.

An alternative to connecting to the ignition switch is to find a non-permanent power source that is only available when the vehicle is running, for example, the power source for the FM radio.

IGN signal can be configured to start transmitting information to the backend server when ignition is on, and enter the power saving mode when ignition is off.

3.9. Digital Inputs

There are three general purpose digital inputs on GV300W. They are all negative triggers.

Table 8. Electrical Characteristics of the Digital Inputs

Logical status	Electrical characteristics
Active	0V to 0.6V
Inactive	Open

The following diagram shows the recommended connection of a digital input.

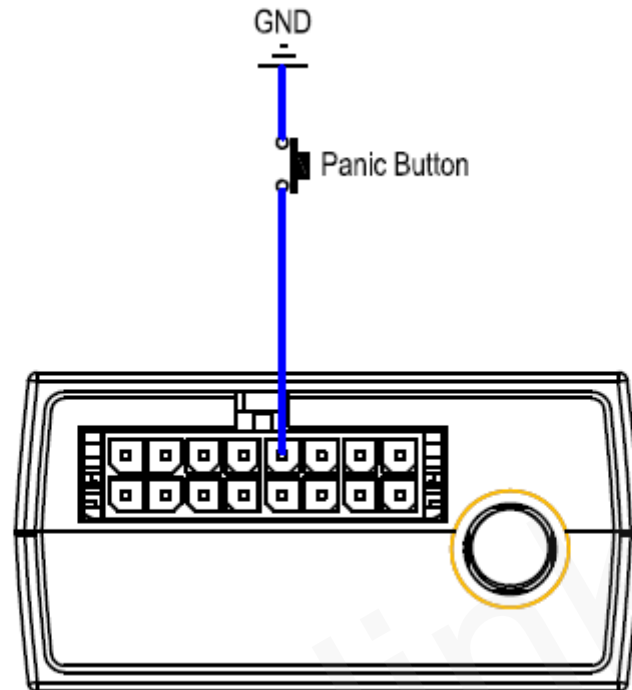


Figure 11. Typical Digital Input Connection

3.10. Analog Inputs

There are two analog inputs on GV300W, and the analog input voltage range is from 0 to 16V. The following diagram shows the recommended connection.

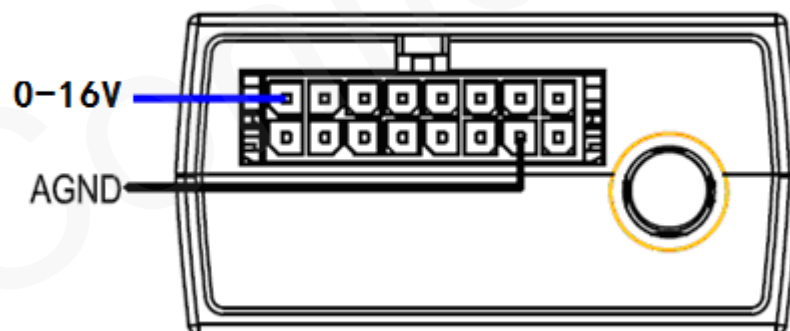


Figure 12. Typical Analog Input Connection

Note:

PIN 15 is a multifunction pin: it can be configured as a digital input or an analog input.

3.11.Digital Outputs

There are three digital outputs on GV300W. All are of open drain type and the maximum drain current is 150 mA. Each output has the built-in over current PTC resettable fuse.

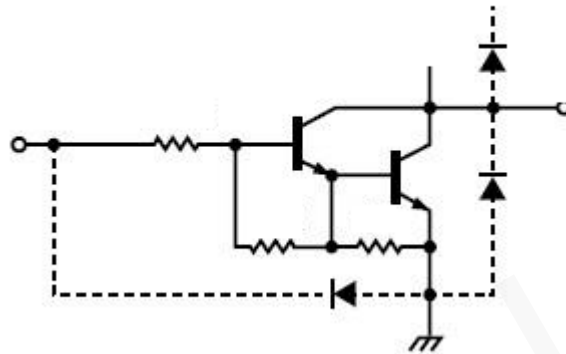


Figure 13. Digital Output Internal Drive Circuit

Table 9. Electrical Characteristics of Digital Outputs

Logical status	Electrical characteristics
Enable	<1.5V @150 mA
Disable	Open drain

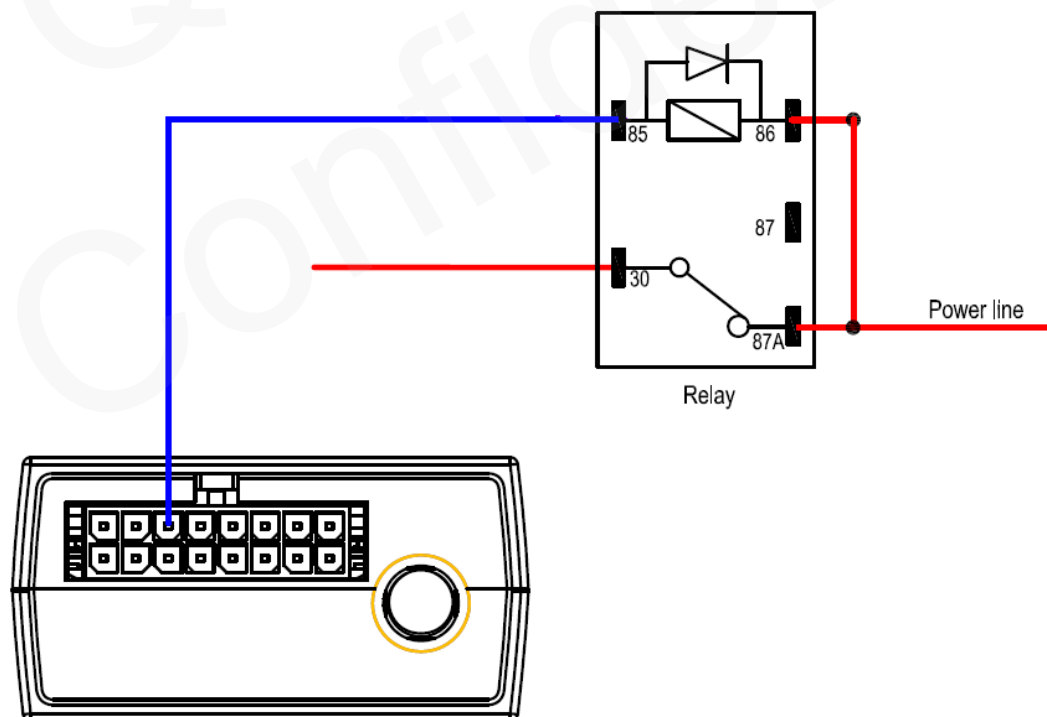


Figure 14. Typical Connection with Relay

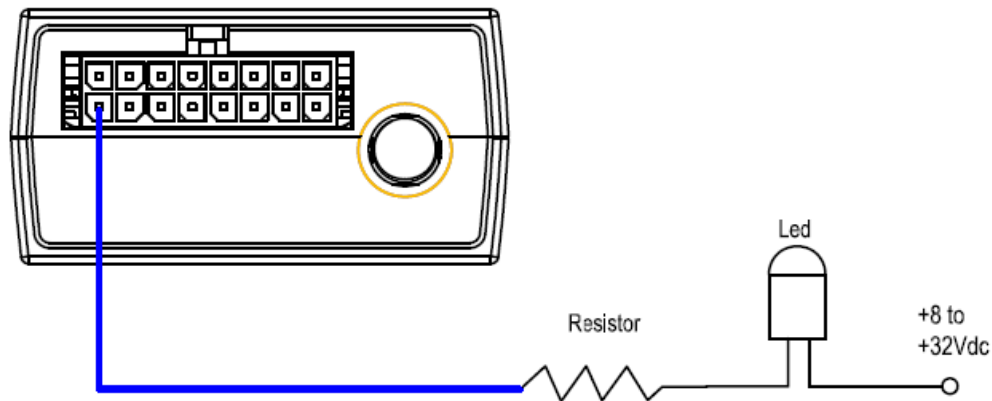


Figure 15. Typical Connection with LED

Note:

1. OUT1 will latch the output state during reset.
2. Many modern relays come with a flyback diode pre-installed internal to the relay itself. If the relay has this diode, ensure the relay polarity is properly connected. If this diode is not internal, it should be added externally. A common diode such as a 1N4004 will work in most circumstances.

3.12.Device Status LED

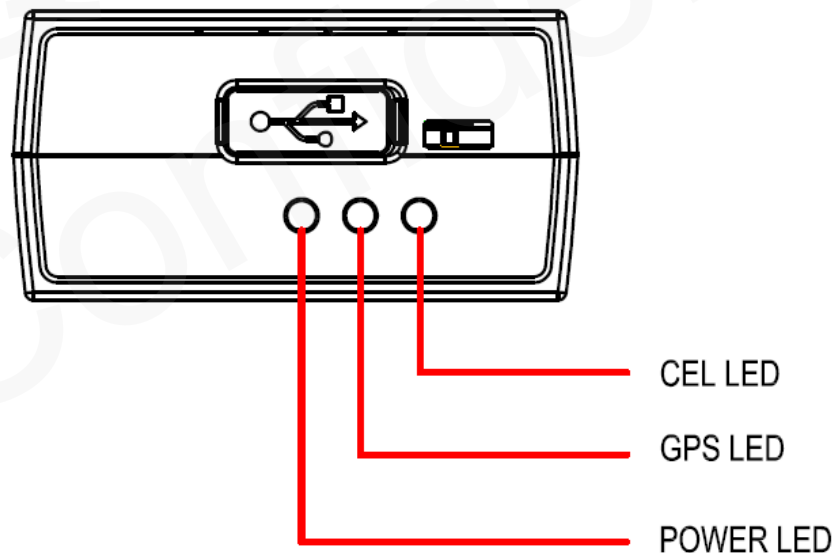


Figure 16. GV300W LED on the Case

Table 10. Definition of Device Status and LED

LED	Device status	LED status
CEL (Note 1)	Device is searching WCDMA network.	Fast flashing (Note 3)
	Device has registered to WCDMA network.	Slow flashing (Note 4)
GPS (Note 2)	SIM card needs pin code to unlock.	ON
	GPS chip is powered off.	OFF
	GPS sends no data or data format error occurs.	Slow flashing
	GPS chip is searching GPS info.	Fast flashing
	GPS chip has gotten GPS info.	ON
PWR (Note 2)	No external power and internal battery voltage is lower than 3.35V.	OFF
	No external power and internal battery voltage is below 3.5V.	Slow flashing
	External power in and internal battery is charging.	Fast flashing
	External power in and internal battery is fully charged.	ON

Note:

1. CEL LED cannot be configured.
2. GPS LED and PWR LED can be configured to turn off after a period of time by using the configuration tool.
3. Fast flashing: for CEL LED is about 60 ms ON/780 ms OFF; for GPS LED and PWR LED is about 100 ms ON/100 ms OFF.
4. Slow flashing: for CEL LED is about 60 ms ON/1940 ms OFF; for GPS LED and PWR LED is about 600 ms ON/600 ms OFF.

3.13. Serial Port/UART Interface

There are two lines dedicated to the Serial Port/UART interface (TXD and RXD). TXD/RXD are standard RS232 signal.

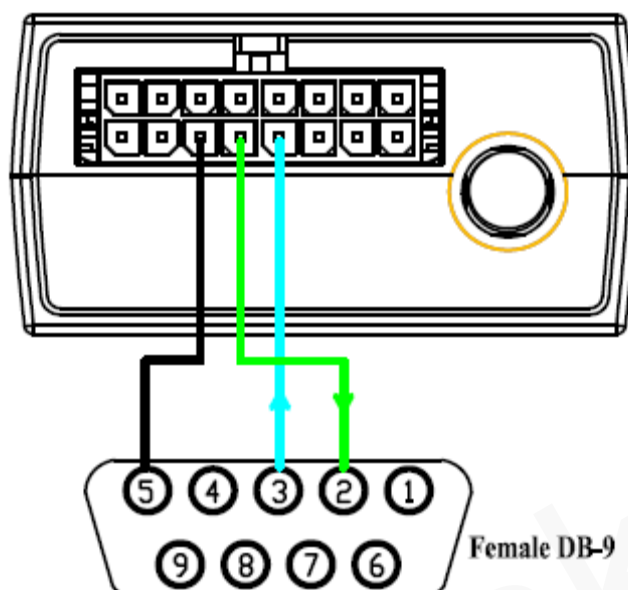


Figure 17. Typical Connection with RS232 Port

3.13.1. Connect with Garmin GPS Set

GV300W can communicate with Garmin GPS set. The following typical connection is using Queclink AG100 cable.



Figure 18. GV300W Connection with Garmin GPS Set

Note:

Some versions of GV300W can connect with Garmin GPS set by Garmin FMI10/FMI15 cable. Please consult Queclink for detail information.

3.13.2. Connect with CAN100 device

GV300W can communicate with CAN100 device. Only for the serial ports of CAN100 device is RS232. The following picture shows the external interface of CAN100 device. Refer to Figure 19.

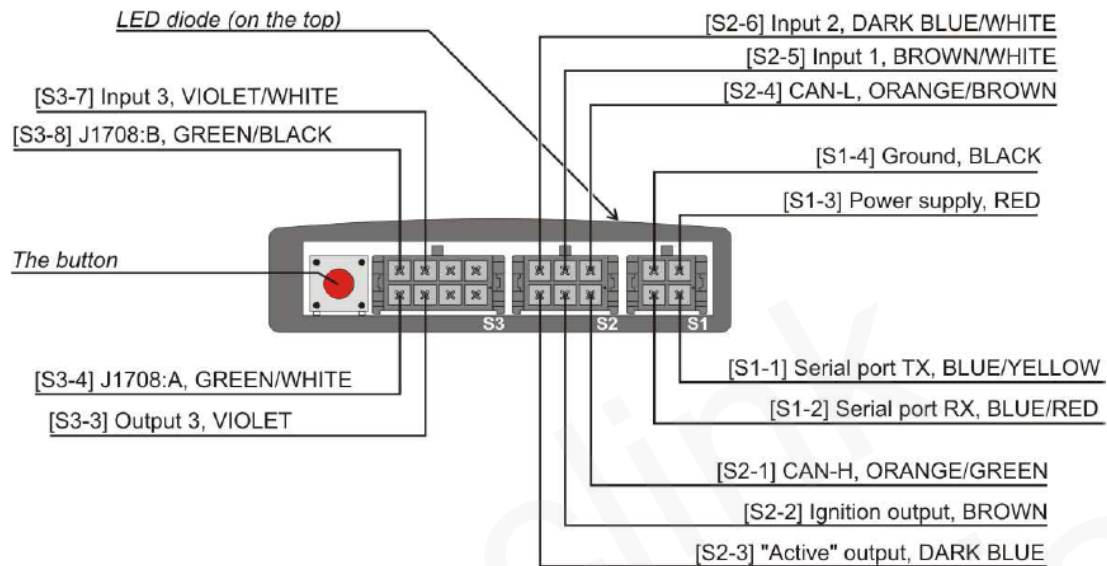


Figure 19. The External Interface of CAN100 Device

The following table 11 shows the definition of CAN100 device's external interface.

Pin No.	Pin Name	Cable Color
S1-1	TX	Blue/Yellow
S1-2	RX	Blue/Red
S1-3	Power Supply	Red
S1-4	Ground	Black

Table 11. External Interface of CAN100 Device

The Following table 12 shows how to connect with the GV300W.

GV300W				CAN100		
Pin No.	Pin Name	Color	Connection	Pin No.	Pin Name	Color
4	RXD	Green or Pink	←-----→	S1-1	TX	Blue/Yellow
5	TXD	White/Black	←-----→	S1-2	RX	Blue/Red
11	Power	Red	←-----→	S1-3	Power Supply	Red
6	Ground	Black	←-----→	S1-4	Ground	Black

Table 12. CAN100 Device Connect with GV300W

Note:

How to distinguish the CAN100 device's serial port is RS232 or TTL, Please refer to CAN100 specification.

RF Exposure Statement:

For the product, under normal use condition is at least 7.1cm away from the body of the user the user must keeping at least 7.1cm distance to the product.

This device complies with Part 15 of the FCC Rules. Its operation is subject to the following Two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Note:

THE GRANTEE IS NOT RESPONSIBLE FOR ANY CHANGES OR MODIFICATIONS NOT EXPRESSLY APPROVED BY THE PARTY RESPONSIBLE FOR COMPLIANCE. SUCH MODIFICATIONS COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT

This product has been tested and found to comply with the limits for Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This product generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this product does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.